



REPORT

Applied Avalanche Research in Norway

AARN

ANNUAL REPORT 2020

DOC.NO. 20200017-02-R

REV.NO. 0 / 2021-03-19

Neither the confidentiality nor the integrity of this document can be guaranteed following electronic transmission. The addressee should consider this risk and take full responsibility for use of this document.

This document shall not be used in parts, or for other purposes than the document was prepared for. The document shall not be copied, in parts or in whole, or be given to a third party without the owner's consent. No changes to the document shall be made without consent from NGI.

Ved elektronisk overføring kan ikke konfidensialiteten eller autentisiteten av dette dokumentet garanteres. Adressaten bør vurdere denne risikoen og ta fullt ansvar for bruk av dette dokumentet.

Dokumentet skal ikke benyttes i utdrag eller til andre formål enn det dokumentet omhandler. Dokumentet må ikke reproduseres eller leveres til tredjemann uten eiers samtykke. Dokumentet må ikke endres uten samtykke fra NGI.



Project

Project title: Applied Avalanche Research in Norway (AARN)
Document title: Annual Report 2020
Document no.: 20200017-02-R
Date: 2021-03-19
Revision no. /rev. date: 0 /

Client

Client: NVE
Client contact person: Odd Are Jensen and Aart Verhage
Contract reference: Tildelingsbrev 04.12.2020

for NGI

Project manager: Christian Jaedicke
Prepared by: Peter Gauer, Sean Salazar, Kate Robinson, Dieter Issler, Regula Frauenfelder, Henrik Langeland, Zhongqiang Liu, Ulrik Domaas, Christian Jaedicke, Graham Gilbert
Reviewed by: Graham Gilbert, Christian Jaedicke, Dieter Issler

Summary

During the first year of the project period 2020-2022 of NGIs research project on Snow avalanches, Applied Avalanche Research in Norway (AARN), work was conducted in all three work packages (WP 1 – Avalanche formation and release, WP 2 – Avalanche dynamics, WP 3 – Avalanche interaction) and several cross-package topics. In addition, several significant upgrades were made to the research infrastructure at Fonnbu and Ryggfonn. During 2020, the results of the research activities have been published in peer-reviewed journals, summarised in technical notes, and presented online at national and international conferences and seminars. AARN personnel have been actively engaged in educational outreach activities, including as lecturers and student supervisors.

Contents

1	Overview and administrative aspects	6
1.1	Project activities in 2020	6
1.2	Involved personnel	7
1.3	Budget	7
1.4	Dissemination	8
1.5	Teaching and student supervision	10
2	WP 1 – Avalanche formation and release	10
2.1	Simple probabilistic release models	10
3	WP 2 – Avalanche dynamics	10
3.1	New instrumentation for avalanche dynamics research	10
3.2	Avalanche experiments	14
3.3	Reasons for extreme avalanche runouts	14
3.4	Mathematical equations of an improved avalanche model	14
4	WP 3 – Avalanche interaction	14
4.1	Alternative mitigation measures	15
4.2	Vulnerability of structures and persons in buildings	18
4.3	Residual risk	19
5	Research infrastructure resources (RIR)	20
5.1	Full-scale avalanche test-site Ryggfonn	20
5.2	Research station Fonnbu	20
6	Cross-package topics (CPTs)	21
6.1	Avalanche observations and monitoring	21
6.2	Quantitative risk assessment	21
6.3	Forest effects	22
7	Project plan and budget – 2021	22
7.1	Revised work plan 2021	22
7.2	Budget 2021	23
8	References	23

Review and reference page

1 Overview and administrative aspects

1.1 Project activities in 2020

Table 1 Summary of the AARN project activities in 2020, based on the project proposal. Note the research activities in most topics are ongoing.

WP 1 – Avalanche formation and release	<ul style="list-style-type: none"> • Access and validate different approaches for quantifying the spatial and temporal distribution of snow in steep terrain. • Collect data from partners and colleagues on the release volume of natural and artificially triggered avalanches. • Test and compare available wind and statistical models.
WP 2 – Avalanche dynamics	<ul style="list-style-type: none"> • Integrate recent developments in avalanche process studies into new models and evaluate the potential of instrumentation and drone technology for improving our understanding of avalanche dynamics. • Investigation of distributed observational methods – application of microsensors to provide information on avalanche motion and fluidization. • Evaluation of locations for experiments on small avalanches. • Avalanche experiments in Ryggfonn – continuation of long-term monitoring activities: weather, snowpack development, and avalanche activity. Specific topics: release probability, flow, impact forces, and effect of catching dam. • Collect existing observations and measurements of fluidisation mechanics of the avalanche head and find suitable equations for the description of this process • Develop improved models of erosion, entrainment, and deposition. • Establish suitable equations that describe the powder-snow cloud as a separate layer so that it first can be tested as a stand-alone model and later be incorporated into a new multi-layer model.
WP 3 – Avalanche interaction	<ul style="list-style-type: none"> • Identify and evaluate alternative avalanche mitigation measures. (i.e. those which are not widely applied at present). • Determine the vulnerability of typical Norwegian wood frame buildings as a function of avalanche pressure – analysis of historical avalanche disasters to improve estimates of the vulnerability of persons in buildings as a function of the degree of damage. • Methods for quantifying residual risk once mitigation measures are in place.
Research infrastructure resources (RIR)	<ul style="list-style-type: none"> • Stationing of a pulsed Doppler radar systems at Ryggfonn, in collaboration with BWF Innsbruck.

	<ul style="list-style-type: none"> • Installation of a GEODAR radar system, in collaboration with the University of Durham. • Establishment of new a time-lapse camera and two weather stations, one in the release area and one in the run-out area to improve snowpack monitoring. • Refurbishment of the existing data acquisition system at Ryggfonn. • Maintenance of the Fonnbu research station.
Cross-Package Topics (CPT)	<ul style="list-style-type: none"> • Opportunistic documentation of unique avalanche events. • Investigation of the role of forest effects in avalanche formation, movement, and interaction.

1.2 Involved personnel

The 26 individuals listed in Table 2 contributed to AARN activities in 2020.

Table 2 Contributors to AARN in 2020, listed alphabetically.

Researchers & scientific staff

Breien, Hedda
Domaas, Ulrik
Frauenfelder, Regula
Gauer, Peter
Gilbert, Graham
Gisnås, Kjersti
Glimsdal, Sylfest
Heyerdahl, Håkon
Høydal, Øyvind Armand
Issler, Dieter
Jaedicke, Christian
Kristensen, Krister
Langeland, Henrik
Liu, Zhongqiang

Mo, Katrine

Robinson, Kate
Salazar, Sean
Sandersen, Frode
Strout, James Michael
Technical staff
Lied, Erik
Smebye, Helge Christian
Sverdrup-Thygeson, Kjetil
Administrative staff
Haaland, Kirsten Helness
Johnsen, Maren Kristine
Nakken, Robert
Raddum, Ellen

1.3 Budget

Table 3 gives an overview of the planned and actual allocation of resources to the different work packages (including WP 0 – Project administration). Deviations from the planned allocation are presented below. In order to meet the project objectives and adapt to the changes in the work environment with the COVID-19 pandemic, a number of steps were implemented in AARN including increased frequency of digital project meetings and focusing on research activities which could be completed without travel.

Comments on the deviations from the planned allocation:

WP 0: A significant proportion of the budget allocated to WP 0 went to reporting (337 kNOK) – both from the previous project period and during 2020, monthly

project meetings (286 kNOK), student supervision (81 kNOK), and planning of the seminars in March (cancelled due to covid) and september (total ca. 40 kNOK). The remaining 254 kNOK was used for project administration.

WP 1/WP 2: There less activity than anticipated in WP 1 during 2020, primarily due to the availability of personnel. The difference in financial resources was transferred to WP 2.

WP 3: Activities were increased in WP 3 to compensate for the lack of activities in other project sections. Specifically, we focused on developing the database for investigating the vulnerability of persons in structures (discussed below).

RIR: Several significant infrastructure upgrades were completed at Ryggfonn in 2020. These are discussed in greater detail below. These upgrades were partially financed by other means at NGI.

CPT: A few the cross-package topics (CPT) are opportunistic and require that personnel can travel (e.g. for documentation of unique avalanche events) – these opportunities were limited in 2020, particularly as the latter part of snow season (March – June) coincided with the onset of mobility restrictions in Norway. Other changes relate the availability of AARN personnel. Resources were redistributed to other activities.

Table 3 Budgeted allocation and actual use of resources per work package in 2020 (amounts in kNOK).

	WP 0 (Admin & reporting)	WP 1	WP 2	WP 3	RIR	CPT	Total
Allocated	200	600	750	400	850	1 200	4 000
Used	998	325	1 030	523	516	534	3 926
Difference	798	-275	280	123	-334	-666	-74

1.4 Dissemination

(Underlined names are participants in the AARN project)

Peer-reviewed publications

Gauer, P. (2020). Considerations on scaling behavior in avalanche flow: Implementation in a simple mass block model. *Cold Regions Science and Technology* **180**, 103165; doi: 10.1016/j.coldregions.- 2020.103165.

Grigorian, S. S. and Ostroumov, A. V. (2020). On a continuum model for avalanche flow and its simplified variants. *Geosciences* **10** (1), 35; doi:10.3390/geosciences10010035. Edited by D. Issler.

Issler, D. (2020). Comments on “On a continuum model for avalanche flow and its simplified variants” by S. S. Grigorian and A. V. Ostroumov. *Geosciences* **10** (3), 96; doi:10.3390/geosciences10030096.

Issler, D. (2020). The 2017 Rigopiano avalanche—dynamics inferred from field observations. *Geosciences* **10** (11), 466; doi: 10.3390/geosciences 10110466.

Nishimura, K., Barpi, F. and Issler, D. (submitted). On the Special Issue "Snow Avalanche Dynamics". Submitted to *Geosciences*.

Presentations at conferences, seminars and meetings

Gauer, P. (2020) Avalanche hazard assessment of Pollfjell, Lyngen, Vital Infrastruktur Arena (VIA) Temamøte: Ras- og skredsikring 21 and 28 October 2020 Webinar.

Pérez-Guillén, C., Tsunematsu, K., Nishimura, K., and Issler, D. (2020) Seismic localization and dynamical characterization of snow avalanches and slush flows of Mt. Fuji, Japan, EGU General Assembly 2020, Online, 4–8 May 2020, EGU2020-13407, <https://doi.org/10.5194/egusphere-egu2020-13407>

Salazar, S., Smebye, H., Frauenfelder, R., Miller, F., Solbakken, E., Humstad, T., and McCormack, E. (2020) Airborne Structure-from-Motion modelling for avalanche and debris flow paths in steep terrain with limited ground control, EGU General Assembly 2020, Online, 4–8 May 2020, EGU2020-20529, <https://doi.org/10.5194/egusphere-egu2020-20529>

Reports

McCormack, E., Frauenfelder, R., Salazar, S., Smebye, H., Humstad, T., Solbakken, E., (2020). “Photogrammetry and Drones for Avalanche Monitoring.” Norwegian Public Roads Administration, Report 655.

Robinson, K., Liu, Z. and Issler, D. Vulnerability of structures and persons in buildings. NGI Technical Note 20200017-03-TN

Gauer, P., Aalerud, A.H. and Body, N.S. Avalanche observations versus numerical avalanche model: Simple test of model performance. NGI Technical Note 20200017-04-TN

Gauer, P. and Langeland, H. WP 2 – Full-scale experiments at Ryggfonn: Ryggfonn avalanche observations 2019/2020. NGI Technical Note 20200017-05-TN

1.5 Teaching and student supervision

In 2020, AARN researchers participated in teaching activities at the University Centre in Svalbard (UNIS), University of Oslo (UiO), and University of Tromsø (UiT).

Four master students contributed to AARN activities and were supervised by project researchers in 2020: Ole Kanstad (UiO, completed June 2020), Kristian Ask (NTNU, completed June 2020), Brage Storebakken (UiO, started end of 2020), and Elise Nilsens (UiO, started end of 2020).

2 WP 1 – Avalanche formation and release

2.1 Simple probabilistic release models

Work on a simple probabilistic release model for avalanche Hazard Mapping (Gauer 2018a), was taken up again. The model involves meteorological data from SeNorge, and includes parameters such as HS, HNW, RR, SWE, TA. The model now includes an extended forest parametrization that also accounts for interception. Verification of the model is on-going and will be a central topic in 2021.

3 WP 2 – Avalanche dynamics

3.1 New instrumentation for avalanche dynamics research

Several new technologies and instruments were explored with the goal of better understanding of avalanche formation and dynamics. Among the technologies that were evaluated for monitoring of natural and artificial avalanche releases, were a fully autonomous, pulsed Doppler radar system (further described in Section 6.1), low-cost, distributed geophone sensors, and aerial survey methods.

3.1.1 Aerial survey methods to derive snow distribution

Towards the goal of rapid snow distribution measurements as input for future roadside avalanche hazard assessment and design of mitigation measures, unmanned aircraft systems (UAS, or drones) were among the technologies that were explored. Specifically, continuous snow cover mapping and drone-based roadside inspection of snow-loaded areas of interest (i.e. on avalanche paths), were investigated. Low-cost, consumer-grade drones were utilized with a direct georeferencing survey technique. The main advantage of the direct georeferencing methodology was to perform a survey rapidly without the need for extensive ground control. Compared to conventional drone-mapping techniques, which require well-distributed and independently surveyed ground control points for referencing drone image products, the direct georeferencing method minimised survey time and reduced exposure of field personnel.

To validate the aforementioned methodology, two field investigations were performed over Sætreskarsfjellet, in Grasdalen, as depicted in Figure 1. One UAS survey was performed to establish a snow-free baseline and a second UAS survey was performed to provide a comparison with snow cover. In both cases, a terrain-following flight plan was utilized. The aerial survey images were processed using a Structure-from-Motion processing workflow to derive high-resolution, three-dimensional surface models. The difference between the surface models was used to estimate snow depth across the entire surface of the surveyed area. A snow depth probe was deployed in the field at the time of survey to provide ground validation for comparison of the drone-derived snow depths.

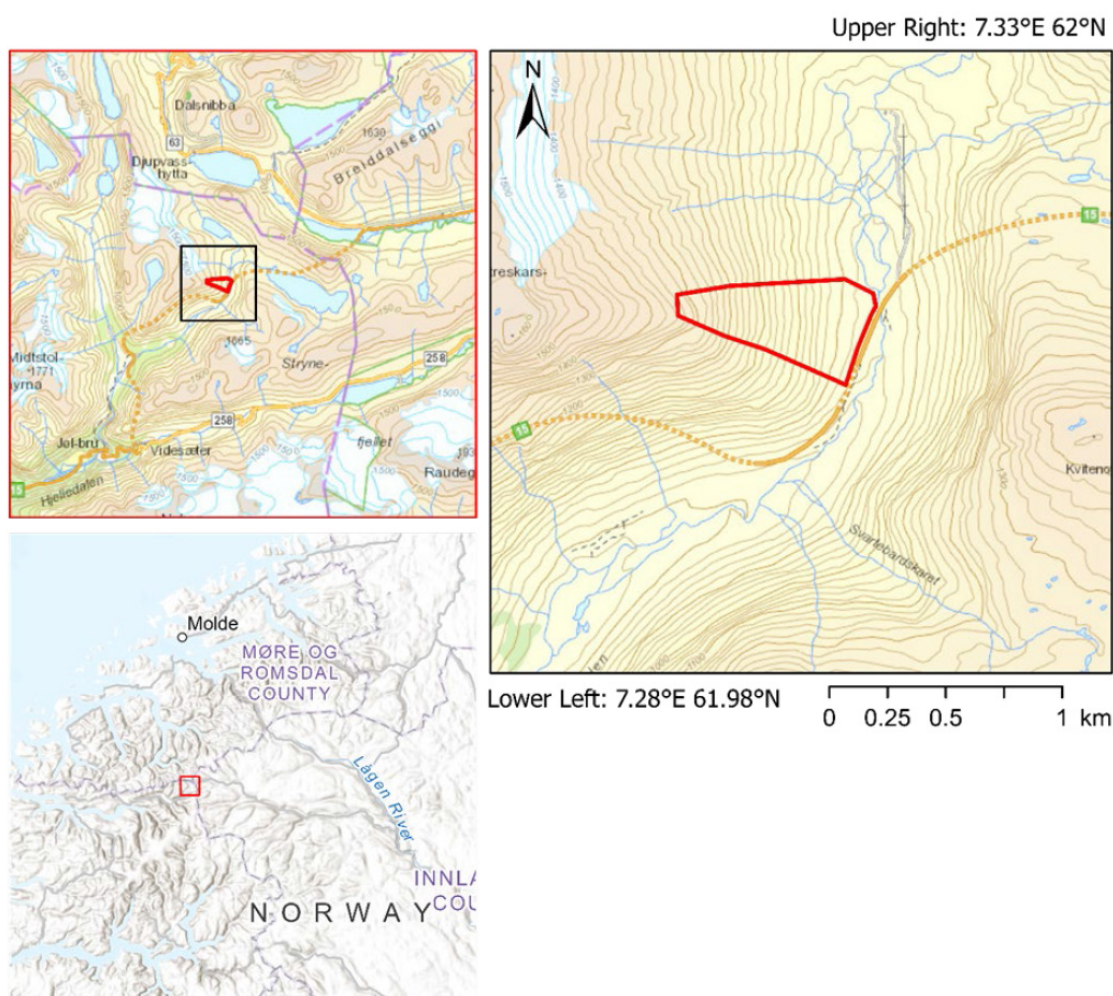


Figure 1 UAS survey area on Sætreskarsfjellet in Grasdalen, Vestland county (source data: Geodata AS, Kartverket; figure reproduced from McCormack et al., 2020)

Challenges related to hardware and software capabilities, as well as the lack of reliable 4G network coverage, were encountered during testing of the direct georeferencing method. To overcome these limitations, the survey area was divided into two parts (as depicted in Figure 2) and a portable base station was deployed to assist in the collection

of relative real-time kinematic data. The challenges encountered were representative for data collection campaigns in remote and mountainous terrain.

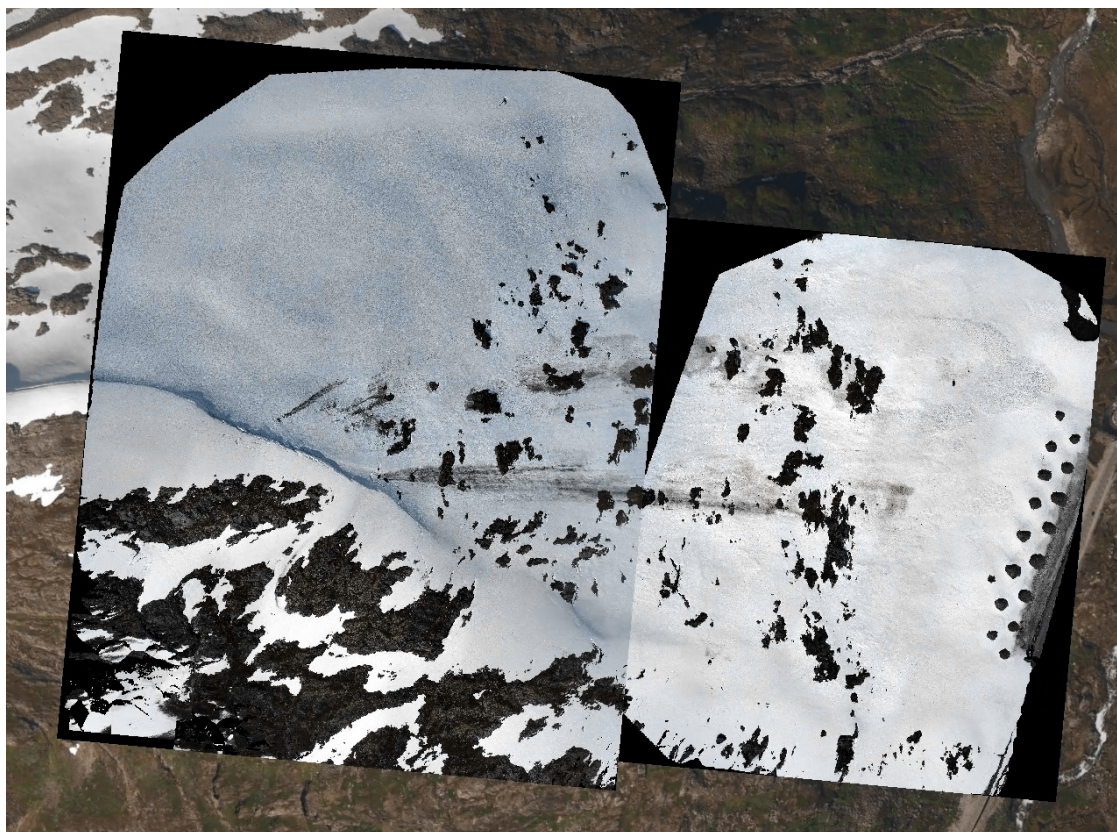


Figure 2 High-resolution orthomosaic derived from drone imagery over Sætreskarsfjellet in Grasdalen, Vestland county (source data: Kartverket).

A comparison of the snow-depth values, as obtained from snow probe measurements and from drone-based Structure-from-Motion modelling, revealed that the reliability of depth measurements was variable. While the measurements were in poor agreement (as depicted in Figure 3a) in the release area, the measurements at the base of the runout area were generally in good agreement (as depicted in Figure 3b). Factors that could have influenced the accuracy of the comparison include measurement error in the field, uncertainty in the terrain model differencing technique, and a limited number of samples. The potential for rapid, drone-based snow mapping was demonstrated and will be further explored in 2021.

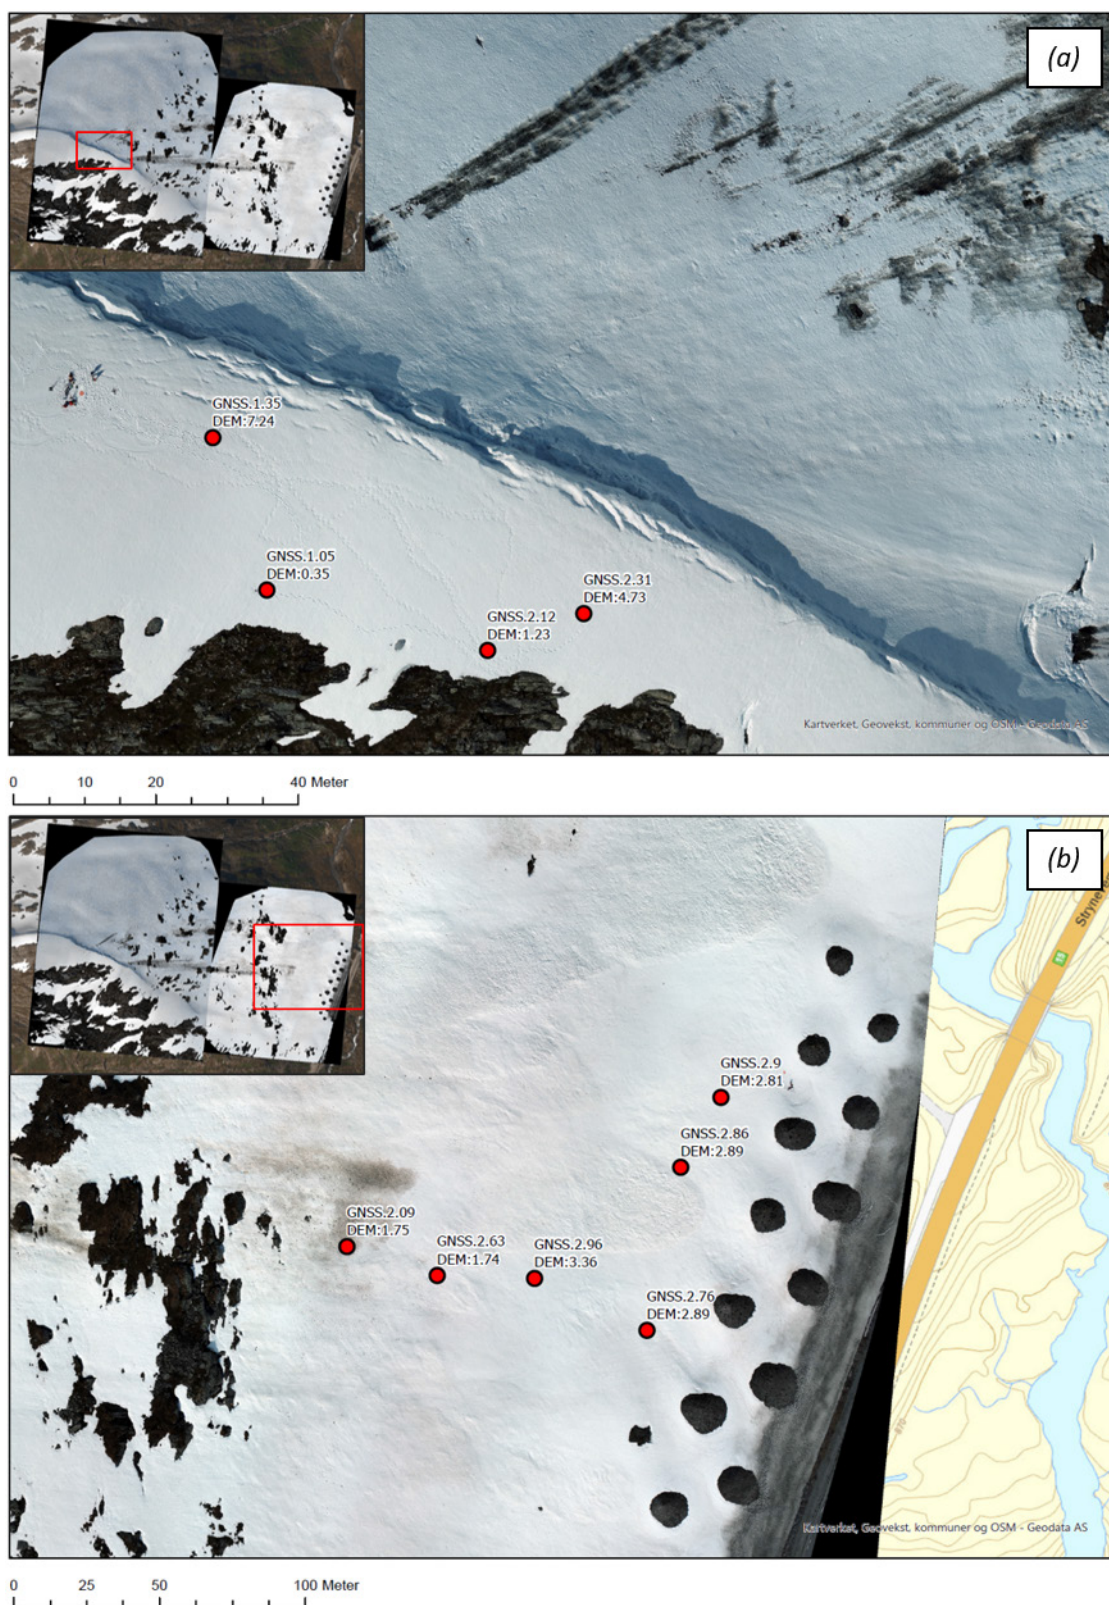


Figure 3 Ground control points (indicated in red), labelled with estimated snow depth according to snow probe ("GNSS") and drone survey ("DEM"), in the a) release area and b) runout area.

3.2 Avalanche experiments

Ten natural avalanches of size 2 and 3 on the EAWS scale occurred during the 2019/2020 winter season in Ryggfonn. The avalanches released between the end of December and early April. Due to regional travel restrictions related to the Covid-19 pandemic, it was not possible to launch a field campaign in 2020. Nonetheless, the instrumentation natural releases provided some pressure data and rough estimates on local velocities. These events also confirmed that it is desirable to have an autonomous RADAR system at the site to obtain velocity data and a system of time-lapse cameras to obtain continuous information about the conditions before and after natural releases. Although field observations were carried out on few occasions after an event, the gained information was limited by weather constraints (e.g. poor visibility). A summary of these avalanches is reported in 20200017-05-TN.

3.3 Reasons for extreme avalanche runouts

Extending the consideration on the scaling behaviour of avalanches flow (Gauer, 2018b), simple mass block simulations were run, revealing once again the importance of mass entrainment for the dynamics of avalanches (Gauer, 2020). The simulations imply that, besides an effective friction coefficient, the ratio between snow entrainment and initial mass has a decisive role for fast moving avalanches and long runouts. Smaller ratios favour higher velocities and with increasing mass along the track the velocity squared dependency of the retarding acceleration should decrease. This is partially in contrast with today's proposed parameter values for the Voellmy friction law used in many avalanche models. Some discussion on this can also be found in 20200017-04-TN.

3.4 Mathematical equations of an improved avalanche model

A post-doctoral researcher will be hired 2021 to contribute to development of an advanced mathematical model of avalanche flow in AARN. In preparation for hiring in this position, options for different aspects of the model were investigated. These activities will be continued in 2021.

4 WP 3 – Avalanche interaction

Motivation for working with avalanche interaction in AARN is derived in part from NVE's, together with other experts, recent initiative to develop a digital handbook to guide the selection and implementation of structural mitigation measures for geohazards – including landslides, debris flows, rockfalls, floods, and avalanches. The digital handbook will give guidance in all phases from planning, management, operation and maintenance of physical mitigations. The handbook is meant for designing engineers, entrepreneurs, practitioners, and responsible persons in municipalities and governmental institutions, agencies and directorates.

4.1 Alternative mitigation measures

This year we investigated a large powder avalanche in Nærøydalen, Aurland, to study the effects of the powder part on a forest and observe the run-out zone (Figure 4). The aim is to back calculate the velocity and to estimate the pressure from the snow cloud. The results will be used to make criterion for physical mitigations for areas where the powder part of the avalanche is the dimensioning factor. For instance, several schools and playgrounds in Norway will benefit from these results.



Figure 4 The Kjerrskredene avalanche was filmed by Stine Larsen Ramsøy (2020)

In 2021 we hope to have a workshop with NVE and other relevant actors to discuss new pressure criteria to be used in hazard zone mapping and for securing constructions in avalanche areas. Other countries, including Austria, Switzerland, and Iceland, have included pressure criteria in hazard mapping. We will evaluate these criteria and consider their applicability to the Norwegian context. New criteria will make it possible to plan for strengthening buildings and secure outdoor activities in avalanche run-out zones.

New methods in physical mitigations are based in part on existing methodologies and materials commonly used for other engineering purposes. A significant challenge in the adoption of these novel mitigation measures will be ensuring that they conform to new pressure criteria. There is a high demand for more buildable space in Norway and cost-efficient solutions for mitigating against natural hazards. Investigation of new physical mitigation methods will help to efficiently secure more housing areas, roads and other types of infrastructure, and may also help to address how existing mitigation measures may be considered in the context of multi-hazards.

Most of these new methods have been tested to a degree but not implemented in Norway so far. For instance, avalanche and rockfall catching wall made of sheet pile walls (in steel) have been erected for a main road in Iceland (Figure 2). These have proven efficient for stopping small snow avalanches as well as rockfalls coming down to the road. In addition, a flat area between the wall and mountain foot ensures increased storage capacity.



Figure 5 Sheet pile structure to stop rockfall and small avalanches. Photo A. Jonsson

Another physical mitigation we have observed is an avalanche deflecting steel wall along the steep part of the talus to direct avalanches and debris flows away from the village of Guttannen, Switzerland (Figure 3). Such structures are possible to erect in steeper terrain than what is possible with conventional solutions.



Figure 6 Guttannen, Berner Oberland, Switzerland. Photo NGI

A third new type of physical mitigation is in steep avalanche terrain just above the meteorological station under Zugspitze in Germany (Figure 4). The station is secured by supporting structures just above the station and in the avalanche release areas above, to keep the snow in place. In addition, a plough-shaped steel construction is in place to divert avalanches to around the station.

Supporting structures for deflecting snow avalanches have not been used in Norway. The solution is interesting since it can be used in steep, difficult terrain, and also permits some energy dissipation due to the open structure. Study of energy dissipation in semi-open structures can be used both for deflecting and dissipate energy from avalanches.



Figure 7 Meteorological station Zugspitze (P. Gauer). Photo right is from Cortina, Italy (A. Jonsson).

A fourth physical mitigation is the use of wire rope net fences to stop small avalanches (Figure 5). We see examples from Fieberbrunn and Attersee, Switzerland, Honningsvåg, Nordvågen road, and in Alpine ski resort Lech (research test area).



Figure 8 Barrier in Fieberbrunn, 15. April 2004 stopped a small avalanche (Photo Stefan Magreth).

4.2 Vulnerability of structures and persons in buildings

Activities in 2020 were focused on developing vulnerability curves for persons inside buildings. These curves were based on those created from the Longyearbyen avalanche in 2017. In 2021 work will continue on vulnerability of persons inside buildings with simulations run on buildings impacted with avalanches to create building vulnerability curves.

A compilation of avalanche/slush flow events from the Norwegian avalanche database which impacted buildings and have mention of people inside was compiled. Records were scanned from 1900 to present day (2020) and summarized in a table with number of persons inside, information on the persons where possible (age, gender, location in building), # survived, # injured, # escaped, and related articles such as blogs or news stories detailing the events. Approximately 90 cases were found with a reasonable amount of detail. A snapshot of the database is shown in Figure 9.

In the same table, a start was made to assess the damage to buildings based on text descriptions, and compile supporting photographs, however a finalized damage scale has not been decided upon. Once the damage scale has been selected and each case is reviewed, a preliminary vulnerability curve for persons inside buildings will be created.

Figure 9 Preliminary database on avalanche events impacting buildings with persons inside

Activities in 2021 will also focus on including uncertainties into empirical vulnerability curves based on historical avalanche events and assess vulnerability of typical Norwegian buildings subjected to avalanche loads in a probabilistic framework, using finite element method (FEM), e.g. Opensees or Plaxis. A comparison of empirical vulnerability curves and vulnerability curves derived from FEM will be conducted.

The risk from avalanches can never be totally mitigated by avalanche protection measures. Support structures can be overtopped, avalanche dams can prove to be too low and avalanche forecasting can assess the avalanche danger wrong. We want to develop a framework to estimate the residual risk after mitigation such that we are able to estimate and quantify the effects of mitigation measures and the consequences of using protected areas after mitigation. This work is strongly based on the outcome from other work packages and is therefore not started in 2021.

5 Research infrastructure resources (RIR)

AARN is utilising two main sites with actively deployed research infrastructure; (1) the full-scale test-site Ryggfonn and (2) the mountain research station Fonnbu. Both are organised as a "leiested" and receive basic funding from AARN to maintain the resourced and provide services for the research activities. In autumn 2020 a proposal was submitted to NFR to apply for a significant upgrade of the Ryggfonn-Fonnbu facility to the Strynefjellet Mountain experiment. We anticipate the outcome of this application during late 2021.

5.1 Full-scale avalanche test-site Ryggfonn

Under this task, necessary repairs and updating of the data acquisition system at the Ryggfonn avalanche test site (Stryn municipality, Vestland county, western Norway) were carried out so that the site is ready for the winter season 2020/2021.

Several upgrades were made at the Ryggfonn test site, financed by other research funding available at NGI. The updates include two compact weather stations, positioned at the top and at the valley bottom, to have better information on the environmental conditions during avalanche release. Secondly, the infrastructure for the installation of an autonomous pulsed Doppler radar was put in place. The radar was installed early 2021 in cooperation with BFW in Innsbruck, Austria, which offered a Doppler RADAR systems for Ryggfonn. Figure 6 show the new instruments.



Figure 10 Doppler Radar from BFW (left) and weather station at the instrumentation hut (right).

5.2 Research station Fonnbu

The research station Fonnbu had a general clean up and update of facilities to meet the needs of the winter activities. Due to the travel restrictions in 2020, the research station was not used as often as planned. During the autumn, the weather observation system was improved by including temperature and wind measurements at the meteo mast. This is important to maintain continuous observations from the same location. At the same

time, a new camera was installed on the meteo mast. The fully remote controllable camera can turn 360 degrees and has a high optical zoom function. The camera provides live video and can be programmed to take still pictures from specific locations at a given time interval. This allows us to follow the development of snow distribution and avalanche activity. Currently other research projects at NGI are looking into the possibilities of automatic image analysis for snow distribution and avalanche activity.



Figure 11 Pictures from the new camera on the meteo mast at Fonnbu. Left shows the research station, right shows the release area of Ryggfonn.

6 Cross-package topics (CPTs)

6.1 Avalanche observations and monitoring

Observations of avalanche events in Norway are often biased by the initiator and the personal interests of the observer. While an engineer would be interested in the damage on structures in the avalanche path and run out zone, an avalanche forecaster would most likely be more interested in the properties of the weak layer in the starting zone. The element of avalanche dynamics which experts are most interested in the run-out length. Experience with analysing the historical avalanche events in the national database, NGI archives and other sources show that we lack a uniform documentation of the events. We have therefore designed observational guidelines for avalanche events to ensure that all important parameters are recorded when we conduct field surveys of interesting events. The parameters are chosen according to the dataset in the national database such that registrations from AARN easily can be transferred to the national database.

6.2 Quantitative risk assessment

A quantitative risk assessment needs to implement the results from other work packages (4.3 probabilistic release modelling, 5.4 probabilistic runout modelling, and 4.2 vulnerability assessment). We therefore await results from the other work packages before we put efforts into this work. In the GBV-HARM, a probabilistic version of Voellmy model was developed to conduct runout analysis in a probabilistic way using Monte Carlo simulations. However, uncertainty quantification of friction parameters needs further refinement and will be addressed later in the project.

6.3 Forest effects

Work on a simple probabilistic release model for avalanche Hazard Mapping (Gauer 2018), was taken up again. The model involves meteorological data from SeNorge, such as HS, HNW, RR, SWE, TA. The model now includes an extended forest parametrization that also accounts for interception. Forest influence the snowpack and its stability in various way. Forest covers to a certain degree the amount of snow on the ground. Loading intensity is reduced due to interception, which depends on the leaf area index (LAI), the crown cover, and the amount of precipitation; with increasing precipitation the effect of interception decreases. The forest-cover also influences the weak layer properties directly and it is generally agreed that wide spread of weak layers decreases increasing crown cover. In certain case, "tree bombs" can however cause intense loading of the snowpack and so avalanche release.

7 Project plan and budget – 2021

7.1 Revised work plan 2021

Table 4 Summary of the AARN project activities planned in 2021, based on the project proposal. Note the research activities in most topics are ongoing.

WP 1 – Avalanche formation and release	<ul style="list-style-type: none"> • Test methodology to derive PRA from WindSim or Winstral in combination with Arome wind data • Calculate distribution of strong wind on 8 wind directions during winter based on Arome • Use the distribution (fraction of wind per direction) to weight the wind effect maps from Winstral and WindSim • Set thresholds in weighted wind maps to automatically derive PRA map (together with steepness and the rest of the PRA methodology used in NAKSIN) • Validate against mapped snow avalanches in Stryn/Grasdalen • Validate against PRA map from hazard mapping projects (e.g. Lom, Stryn etc)
WP 2 – Avalanche dynamics	<ul style="list-style-type: none"> • Implement the results from the new radar at Ryggfonn in the workflow of experiment documentation • Start work with the new PostDoc at model approach for a new integrated dynamical avalanche model
WP 3 – Avalanche interaction	<ul style="list-style-type: none"> • Development of a physical model for the powder part of the avalanche. • Investigate the applications for cross-laminated timber (CLT) to strengthen buildings against the powder snow cloud. • Workshop to discuss alternative mitigation measures and new materials (e.g. CLT). • Continue to gather information of the performance of existing physical mitigations to improve avalanche modelling.

Research infrastructure resources (RIR)	<ul style="list-style-type: none"> • Installation of similar camera at as installed at Fonnbu on top of the new radar mast at Ryggfonn • Continue the work to integrate all data that is collected in Grasdalen into one data acquisition system
Cross-Package Topics (CPT)	<ul style="list-style-type: none"> • Follow up on interesting avalanches, collect information and make data easily available for research • Study the impact of forest on snow pack stratigraphy and instability

7.2 Budget 2021

The Budget for 2021 is adjusted based on the experience of the last year and the fact that we will employ a PostDoc for the second half of 2021.

Table 5 Budgeted allocation for 2021 (amounts in kNOK)

	WP 0 (Admin & reporting)	PostDoc	WP 1	WP 2	WP 3	RIR	CPT	Total
Allocated	350	600	400	700	400	650	900	4 000

8 References

- Gauer, P. Avalanche Probability: Slab Release and the Effect of Forest Cover, Proceedings of the International Snow Science Workshop 2018a, Innsbruck, Austria, 2018, 76-83.
- Gauer, P. Considerations on scaling behavior in avalanche flow along cycloidal and parabolic tracks Cold Regions Science and Technology, 2018b, 151, 34-46
- Gauer, P. Considerations on scaling behavior in avalanche flow: Implementation in a simple mass block model, Cold Regions Science and Technology, 2020, 180, 103165
- McCormack, E., Frauenfelder, R., Salazar, S., Smebye, H., Humstad, T., Solbakken, E., 2020. Photogrammetry and Drones for Avalanche Monitoring, Statens vegvesen Rapport Nr. 655.

Dokumentinformasjon/Document information		
Dokumenttittel/Document title Annual Report 2020		Dokumentnr./Document no. 20200017-02-R
Dokumenttype/Type of document Rapport / Report	Oppdragsgiver/Client NVE	Dato/Date 2021-03-19
Rettigheter til dokumentet iht kontrakt/ Proprietary rights to the document according to contract Oppdragsgiver / Client		Rev.nr.&dato/Rev.no.&date 0 /
Distribusjon/Distribution ÅPEN: Skal tilgjengeliggjøres i åpent arkiv (BRAGE) / OPEN: To be published in open archives (BRAGE)		
Emneord/Keywords Avalanche, research, snow, SP4		

Stedfesting/Geographical information	
Land, fylke/Country Norway	Havområde/Offshore area
Kommune/Municipality Stryn	Feltnavn/Field name
Sted/Location Strynefjellet	Sted/Location
Kartblad/Map	Felt, blokknr./Field, Block No.
UTM-koordinater/UTM-coordinates Zone: East: North:	Koordinater/Coordinates Projection, datum: East: North:

Dokumentkontroll/Document control					
Kvalitetssikring i henhold til/Quality assurance according to NS-EN ISO9001					
Rev/ Rev.	Revisjonsgrunnlag/Reason for revision	Egenkontroll av/ Self review by:	Sidemanns- kontroll av/ Colleague review by:	Uavhengig kontroll av/ Independent review by:	Tverrfaglig kontroll av/ Interdisciplinary review by:
0	Original document	2021-03-17 Christian Jaedicke	2021-03-18 Graham Gilbert		

Dokument godkjent for utsendelse/ Document approved for release	Dato/Date 19 March 2021	Prosjektleder/Project Manager Christian Jaedicke
--	-----------------------------------	--

NGI (Norwegian Geotechnical Institute) is a leading international centre for research and consulting within the geosciences. NGI develops optimum solutions for society and offers expertise on the behaviour of soil, rock and snow and their interaction with the natural and built environment.

NGI works within the following sectors: Offshore energy – Building, Construction and Transportation – Natural Hazards – Environmental Engineering.

NGI is a private foundation with office and laboratories in Oslo, a branch office in Trondheim and daughter companies in Houston, Texas, USA and in Perth, Western Australia

www.ngi.no

NGI (Norges Geotekniske Institutt) er et internasjonalt ledende senter for forskning og rådgivning innen ingeniørrelaterte geofag. Vi tilbyr ekspertise om jord, berg og snø og deres påvirkning på miljøet, konstruksjoner og anlegg, og hvordan jord og berg kan benyttes som byggegrunn og byggemateriale.

Vi arbeider i følgende markeder: Offshore energi – Bygg, anlegg og samferdsel – Naturfare – Miljøteknologi.

NGI er en privat næringsdrivende stiftelse med kontor og laboratorier i Oslo, avdelingskontor i Trondheim og datterselskaper i Houston, Texas, USA og i Perth, Western Australia.

www.ngi.no

